

# YOUR SITE SUPPLIER NEW ZEALAND WIDE





#### **Powerpac Pro** Safety Glasses



CODE:	LENS TYPE:	MOQ:
619-HC200C	Clear	36
619-HC200S	Smoke	36

#### **Grip-It Safety Glove**



CODE:	SIZES:	MOQ:
6161-GRIPPER	Sizes from 8-12 (M-3XL)	36

### **Class 5 Earplugs**





CODE:	PACK SIZE:	MOQ:
6161-EPU200	200 pairs	5 packs

#### **Buckets**



CODE:	TYPE:	SIZE:
6191-PP20L	Rigid Bucket	20L



#### Spill kits - Universal


CODE:	SIZE:
617-SSK025UV	25L
617-SSK125UV	120L
617-SSK240UV	240L



#### Spill kits - Oil only

CODE:	SIZE:
617-SSK120OIL	120L
617-SSK240OIL	240L

#### **Powerpac Economy** Safety Glasses (



#### **Nitrile Gloves**





CODE:	SIZES:	QTY:
MDNHD	One size fits from 8-11 (M-2XL)	100

#### Marker Paint 500ml 360° Invertible Tip



CODE:	COLOUR		400	
CODE:	COLOUR:		MOQ:	
612-WHTMP500		White	12	
612-FLRMP500		Fluoro Red	12	
612-FLBMP500		Fluoro Blue	12	
612-FLGMP500		Fluoro Green	12	
612-FLYMP500		Fluoro Yellow	12	
612-FLOMP500		Fluoro Orange	12	
612-FLPMP500		Fluoro Pink	12	

#### **Dry Powder Fire Extinguishers**

- Discharge hoses on models 1.5kg or greater. The 0.3 & 1kg models have a standard nozzle outlet.
- Mono-Ammonium Phosphate ABE type (85% MAP content).



CODE:	SIZE:	BRACKET INCLUDED:	FIRE RATING:
8425	1.0kg	UNIVERSAL	1A:20B:E
8411	1.5kg	VEHICLE	2A:20B:E
8412	2.0kg	VEHICLE	3A:30B:E
8413	2.5kg	VEHICLE	3A:30B:E
8414	4.5kg	WALL	4A:60B:E
8415	6.0kg	WALL	4A:80B:E
8416	9.0kg	WALL	6A:80B:E



#### **Galvanised Concrete Screw Bolt - Hex Flanged**



CODE:	GAUGE:	LENGTH:	HEAD:	QTY:
ESB10075G	M10	75mm	14mm	50
ESB10100G	M10	100mm	14mm	50
ESB12075G	M12	75mm	16mm	50
ESB12100G	M12	100mm	16mm	25
ESB12150G	M12	150mm	16mm	25
ESB16100G	M16	100mm	20mm	15
ESB16150G	M16	150mm	20mm	15

#### Screw no.2 **Square Drive**



CODE:	FINISH:	GAUGE:	LENGTH:	QTY:	
SFCQ8X1-1/2YZ	Yellow Zinc	8mm	38mm	500	
SFCQ8X2YZ	Yellow Zinc	8mm	50mm	500	

### **Flathead** Bright - 15kg 💉



CODE:	FINISH:	LENGTH:	QTY:	
FN-LF6028B-15	Bright	2.8 × 60mm	15kg	
FN-LF75315B-15	Bright	$3.15 \times 75$ mm	15kg	
FN-LF10040B-15	Bright	4.0 x 100mm	15kg	

#### **Sof-form**

• Expansion joint filler adhesive backed



CODE:	WIDTH:	THICKNESS:	LENGTH:
6190-SF1075	75mm	10mm	25m
6190-SF10100	100mm	10mm	25m
6190-SF10150	150mm	10mm	25m
6190-SF10200	200mm	10mm	25m
6190-SF10250	250mm	10mm	25m
6190-SF10300	300mm	10mm	25m

#### **Damp Proof** Course



CODE:	SIZE:
6133-BDPC5020	500mm x 20m
6133-BDPC7520	750mm x 20m
6133-BDPC9020	900mm x 20m
6133-BDPC10020	1000mm × 20m
6133-BDPC15020	1500mm × 20m
6133-BDPC20020	2000mm × 20m
6133-BDPC25020	2500mm × 2m
6133-BDPC30020	3000mm x 20m

#### **Self Tapping** Screws



CODE:	FINISH:	GAUGE:	LENGTH:	QTY:
STHWF14-10X50G	Galvanised	14mm	50mm	500
STHWF14-10X75G	Galvanised	14mm	75mm	250
STHWF14-10X100G	Galvanised	14mm	100mm	200

#### **Strip Nails** with Fuel



CODE:	FINISH:	DIAMETER:	LENGTH:	QTY:
FN-IMP90B	Bright	3.15mm	90mm	3000
FN-IMP90G	Galv	3.15mm	90mm	3000
FN-IMP65RG	Galv	3.15mm	65mm	3000

## **Impact Sockets & Nut Setters**



CODE:	SHAPE:	SIZE:	LENGTH:	DRIVE:	TYPE:
NS3865	Hex	3/8"	65mm	1/4"	Nut Setter
NS38150	Hex	3/8"	150mm	1/4"	Nut Setter
NS51665	Hex	5/16"	65mm	1/4"	Nut Setter
NS1465	Hex	1/4"	65mm	1/4"	Nut Setter
TISD16	Hex	16mm	Deep	1/2"	Impact Socket
TISD17	Hex	1 <i>7</i> mm	Deep	1/2"	Impact Socket
TISD18	Hex	18mm	Deep	1/2"	Impact Socket
TISD 19	Hex	19mm	Deep	1/2"	Impact Socket
TISD22	Hex	22mm	Deep	1/2"	Impact Socket
TISD24	Hex	24mm	Deep	1/2"	Impact Socket
TISD32	Hex	32mm	Deep	1/2"	Impact Socket
TISS 15	Hex	15mm	Short	1/2"	Impact Socket
TISS 16	Hex	16mm	Short	1/2"	Impact Socket
TISS17	Hex	1 <i>7</i> mm	Short	1/2"	Impact Socket
TISS18	Hex	18mm	Short	1/2"	Impact Socket
TISS 19	Hex	19mm	Short	1/2"	Impact Socket
TISS24	Hex	24mm	Short	1/2"	Impact Socket

#### **Denso Petrolatum Tape**



CODE:	WIDTH:	LENGTH:
07923418	50mm	1 Om
07923452	100mm	1 Om
Orange		

# **Polythene**



CODE:	DIMENSIONS:	AREA:	THICKNESS:
6190-OP425	4 x 25m	100m²	300 micron



#### **Tie Wire** Reel & Wire





CODE:	PRODUCT:	DIMENSIONS:	QTY:
OX-T299701	Reel Holder	N/A	1
6190-WR1695	Reel Tie Wire	1.57mm OD	1.5 kg roll

#### Wire **Twister**



CODE:

OX-P230231

#### **Smart Clip Precast Chairs**



CODE:	BAR HEIGHT:	MESH HEIGHT:	QTY:
SC25	25mm	25mm	100
SC40	40mm	40mm	100
SC50	50mm	50mm	100
SC65	65mm	65mm	100
SC75	75mm	75mm	100

#### **Precast Bar** Chairs



CODE:	BAR HEIGHT:	MESH HEIGHT:	QTY:
PC25/40	25mm	40mm	200
PC50/65	50mm	65mm	100
PC60/75	60mm	75mm	100

## Circular **Spacers**























# Wire

Tie



CODE:	TYPE:	DIMENSIONS:	QTY:
6190-W400A	Straight	400mm	1 kg
WT110B/2000	Loops	1 1 Omm	2000 ties
WT200B/2000	Loops	200mm	2000 ties

#### Tie Bar **Accessories**







CODE:	PRODUCT:	DIAMETER:	QTY:
6193-WSJ	Waterstop Joiner	1 <i>5</i> mm	1
6193-TRN15	Tie Bar Nut	1.5mm	1
6193-TR153000	Tie Bar	1.5mm	3m
6193-CC25	Conduit Cone	25mm ID	100
CON27400	Conduit	27mm OD	4m

#### Slab On Ground **Bar Chairs**





CODE:	BAR HEIGHT:	MESH HEIGHT:	QTY:	
G25/40	25mm	40mm	100	
G50/65	50mm	65mm	100	
G75/90	75mm	90mm	100	
G85/100	85mm	100mm	50	
6192-BSOG100	100mm	100mm	100	
6192-BSOG120	120mm	120mm	100	
G150/160	150mm	160mm	50	
G150/160NB	150mm	160mm	50	

CODE:	WIRE SIZE:	SIZE:	QTY:
CS206	3-6mm	20mm	100
CS256	3-6mm	25mm	100
CS306	3-6mm	30mm	100
CS1512	8-12mm	15mm	100
CS2012	8-12mm	20mm	100
CS2512	8-12mm	25mm	100
CS3012	8-12mm	30mm	100
CS4012	8-12mm	40mm	100
CS5012	8-12mm	50mm	100

CODE:	WIRE SIZE:	SIZE:	QTY:
CS6512	8-12mm	65mm	100
CS7512	8-12mm	75mm	100
CS2520	16-20mm	25mm	100
CS3020	16-20mm	30mm	100
CS4020	16-20mm	40mm	100
CS5020	16-20mm	50mm	100
CS7520	16-20mm	75mm	100
CSHD6520	10-20mm	65mm	40
CSHD7520	12-20mm	75mm	30



#### Drossbach **Steel Ducting**





CODE:	INTERNAL DIAMETER:
DB4045	40mm
DB5055	50mm
DB6065	60mm
DB7075	70mm
DB8085	80mm

#### Rebar Caps



CODE:	MATERIAL:	SUITS REBAR SIZE:	PK QTY:
SCY100	Plastic	12mm - 32mm OD	100PK

### **PVC Pipe -**6m Lengths



CODE:	DIAMETER:	LENGTH:
100.32	32mm	6m
100.40	40mm	6m
100.50	50mm	6m
100.65	65mm	6m
100.80	80mm	6m
100.100	100mm	6m
100.150	150mm	6m

#### Recipro Saw Blades



CODE:	BLADE TYPE:	LENGTH:
150MB	"Metal Buster" Metal Cutting	1 <i>5</i> 0mm
150NB	"Nail Buster" Wood/Nails	150mm
150NBE	"Nail Buster Extreme" Demolition	150mm
230MB	"Metal Buster" Metal Cutting	230mm
230NB	"Nail Buster" Wood/Nails	230mm
230NBE	"Nail Buster Extreme" Demolition	230mm
300MB	"Metal Buster" Metal Cutting	300mm
300NB	"Nail Buster" Wood/Nails	300mm
300NBE	Nail Buster Extreme	300mm

#### Drossbach **End Caps**



CODE:	TO SUIT:
DBC40	40mm Ducting
DBC50	50mm Ducting
DBC60	60mm Ducting
DBC70	70mm Ducting

#### Black **Polythene**



CODE:	DIMENSIONS:	AREA:	THICKNESS:
44-BLAKPLAS	4 x 25m	100m²	250 micron
44-BLAKPLAS-50	4 x 50m	200m²	230 micron

#### Clean And **Strip Discs**



CODE:	DIAMETER:	BORE:	
BC1041	115mm	22mm	
BC1042	125MM	22mm	
BC1043	178mm	22mm	

#### **Powerpac Metal** Cut Off Disc



CODE:	PRODUCT:	DIA X THICKNESS:	BORE:
6110-CI12510	Inox Pro	125 X 1mm	22mm
6110-CI12525	Inox Pro	125 X 2.5mm	22mm
6110-CI18025	Inox Pro	180 X 2.5mm	22mm
6110-Cl23025	Inox Pro	230 X 2.5mm	22mm
6110-CC12510	Inox Pro Extreme	125 X 1.0mm	22mm
6110-R35040	Rail Pro	350 X 4.0mm	25mm
6110-R40040	Rail Pro	350 X 4.0mm	25mm





CODE:	PRODUCT:	COVER:	BAR SIZE:	QTY:
K2025	Spacer	20, 25mm	40mm	500
K3550	Spacer	35, 40, 45, 50mm	40mm	140
K6575	Spacer	65, 75mm	40mm	54
K1T50	Triangular Spacer	50mm	N/A	1 m

#### **CONCRETE CONSTRUCTION PRODUCTS**

#### Form Fillet



CODE:	SHAPE:	PROFILE SIZE:	PROFILE:	LENGTH:
FFA-171723	Corner	17 X 17 X 23mm	T 7 20 17 mm 1	2.9M
FFB-12121 <i>7</i>	Corner	12 X 12 X 17mm	T 2mm 1 12mm -1	2.9M
FFJA-401216	Joint	40 X 12 X 16mm	+12mm+7	2.9M
FFWF-2912	Chamfer	29 X 12 X 17mm	29 <sub>mm</sub>	2.9M
FFT-1 5400	Chamfer	34 X 17 X 23mm	17mm 34mm	4M

#### **Form** Release





CODE:	QTY:	
RB 7.18-20	20 L	
RB 7.18-200	200 L	

#### **Bio-Lease**



CODE:	QTY:	
RB 7.30-20	20 L	
RB 7.30-200	200 L	

#### **Surface Retarder Plus**





CODE:	PRODUCT GRADE:	APPLICATION:	QTY:
RB 7.17-20	Surface Retarder Plus	Horizontal	20 L
RB 7.17-200	Surface Retarder Plus	Horizontal	200 L
RB 7.24-20	Form-Tard Plus	Vertical	20 L

#### 150 x 100mm **Levelling Shims**



CODE:	FINISH:	QTY:	
SHIM01L	1 mm Brown	200	
SHIM02L	2mm Blue	200	
SHIM03L	3mm Green	100	
SHIM05L	5mm Yellow	100	
SHIM10L	10mm Black	40	
SHIM15L	15mm Grey	40	
SHIM20L	20mm White	30	


#### Form Seal **Clear Silicone**



CODE:	SIZE:	CARTON QTY:
30614662	300ml	20

#### **Bitumen Board**

• Expansion joint filler board range



CODE:	SIZE:
BB122012	2200 X 1220 X 12mm

#### Grout -**GP Standard**

• Great all round non-shrink grout






CODE:	PRODUCT GRADE:	SIZE:	QTY:	
DD 1 0405	C + DI 70 AAD	٥٤١	1-39	
RB 1.04-25	Grout Plus 70 MPa	25kg	40+	

#### Crete Wash

- Safe to use concrete cleaner non-corrosive
- Clean concrete splashes off cars, glass, and tools etc



CODE:	SIZE:
RB 10.13-5	5 L
RB 10.13-20	20 L



### **Builders Props**





CODE:	SIZE:	FORCE RATING:
6140-EP125	1.52m - 2.5m	29.50kN - 20.60kN
6140-EP130	1.82m - 3.0m	29.50kN - 15.75kN
6140-EP135	2.02m - 3.5m	29.50kN - 11.51kN
6140-EP140	2.32m - 4.0m	29.50kN - 8.75kN

#### Fixed 90° Coupler



CODE:			
FX48			

#### Swivel 360° Coupler



CODE:			
SW48			

#### Hardwood **FormPly**

6190-FPF172412





2440 X 1220mm


18mm

CODE:	FINISH:	DIMENSIONS:	WIDTH:
6190-FP241218	Phenol Film 120g/m²	2440 X 1220mm	18mm
CODE:	FINISH:	DIMENSIONS:	WIDTH:

F17 Grade

#### **Tilt Props**





CODE:	SIZE:	FORCE PH:	FORCE PA:	FORCE PZ:
TB31ZG	1.9m - 3.1m	2100 - 943kg	3000 - 1333kg	3000KG
TB41ZG	2.4m - 4.1m	2036 - 889kg	2880 - 889kg	3000KG
TB51ZG	3.1m - 5.1m	1 <i>57</i> 0 - 566kg	2220 - 800kg	3000KG

## **Scaffold Tubing**



CODE:	SIZE:	OUTSIDE DIA:
GALVPIPE	6.5m	48mm

#### **Prop Fork** Head



CODE:	SIZE:
V54Z	90 x 165mm

#### Prop Coupling



CODE:	SIZE:	APPLICATION:
SCAC7648	76 x 48mm	Allows bracing of D Series props

#### **LVL Formwork Timber**



CODE:	PRODUCT:	SIZE:
6193-LVL956558	LVL Beam	95 mm x 65 mm x 5.8m
6193-LVL954758	LVL Beam	95 mm x 47 mm x 5.8m
6193-LVP1507758	LVL Beam	150 mm x 77 mm x 5.8m
CODE:	PRODUCT:	SIZE:
6193-LVL3003658	LVL Boxer Beam	300 mm x 36 mm x 5.8m

#### PECAFIL PERMANENT FORMWORK







- A wide range of standard and bespoke panels and forms for virtually all applications
- Saves time and costs on blinding, labour and spoil removal
- Curved or complicated foundation forms can easily be produced on-site
- No stripping, cleaning or return of the formwork
- Light enough for just one person to handle no need for hoists, ready for rapid assembly
- Fast and easy to install can be cut with basic tools
- Re-use your Pecafil forms, depending on the specific conditions and construction method – no waste
- Reduced working space requirement
- Experienced technical support



CODE:	SHEET SIZE:
6193-PV120225	1200mm x 2250mm
6193-PV150225	1500mm x 2250mm
6193-PV180225	1800mm x 2250mm
6193-PV60225	600mm x 2250mm
6193-PV90225	900mm x 2250mm





#### Hand Held **Grout Mixer**

- Max Ø: 180mm
- Watt: 1800
- Weight: 7.1kg
- Supplied with mixing paddle
- Speed Settings: 250-480rpm \ 430-850rpm

code: EM182R



#### Portamix Pelican **Grout Mixing Station**

- Mix up to 3 × 20kg bags.
- Full dust control lid to help protect you, your lungs and reduce mess.
- Vacuum port for dust extraction.
- Resilient canister liner lowers maintenance costs and is ideal for epoxies and other difficult to clean

code: PMP80



#### **Manual Grouting & Injection Pump**

- Pumping distance: 10m
- Conveying hose:  $10m \times 25mm \varnothing$
- Outlet diameter: 1"
- Hopper capacity: 11 L
- Pumping max: 7-10 L/min
- Pressure: 0-145 psi
- Weight: 72kg

code: ASEGP50M



#### **Electric Screw Grout Pump**

- Voltage: 230V
- Max. Aggregate size: 2.5mm
- Max Pump Distance: 20-30m
- Hopper Size: 30 L
- Pumping max: 1-14 L/min
- Pressure: 0-360 PSI
- · Weight: 25kg
- Can be supplied with a remote control unit
- Potentiometer to control flow/pump rate

code: BMP 6



ASE SM 5

#### **Screw Grouting & Injection Mixer Pump**

- Pumping capacity: 35 l/min
- With various pump: 6-55 l/min
- Pumping pressure: 30 bar
- Max. granule: 5 mm
- Conveying distance: 40 m
- Power supply: 380 V, 50 Hz
- Drive motor: 5.50 Kw
- Mixer: 3 Kw
- Power cable: 5x4 mm2
- Output coupling: 1"
- Conveying hose: Ø 25 mm
- Loading height: 1220 mm
- Weight: 240 kg

code: ASEDEP200



**Screw Grouting & Mixer Pump** 

- Pumping capacity: 25 l/min
- With various pump: 6-35 l/min
- Pumping pressure: 30 bar
- Conveying distance: max. 50 m
- Power supply: 400 V, 50 Hz Pumping motor: 5,50 kW
- Loading motor: 0,55 kW
- Fuse protection: 3x32 A
- Water supply connection: 3/4"
- Water pressure min: 2.5 bar
- Remote control Pneumatic
- Mortar hose: Ø 25 mm
- Hopper content: 150 l
- Loading height: 940 mm
- Loading height: 940 mm
- Total weight: 325 kg
- Dimensions: (L/W/H) 1350/750/1550 mm
- Compressor capacity: 0,9 kW, 250 l/min, max. 6 bar


code: ASESM5



**PUMPING SOLUTIONS AVAILABLE FOR HIRE** 

## **POWER TROWELS**



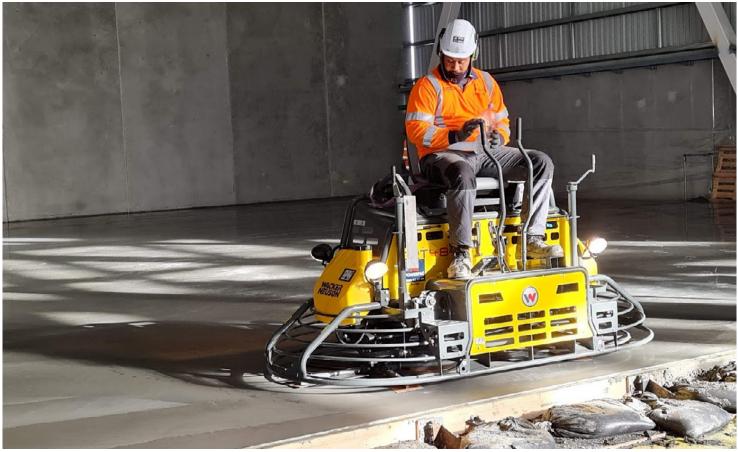

#### Petrol **Cut-off Saw**

- Weight: 11.3kg
   Engine/Motor: Single-cylinder two-cycle gasoline engine, 86cc

  Blade Diameter Max: 350mm
- Blade Speed: 4240rpm

code: 5100005408

With FREE general purpose diamond blade!

code: 6110-310353





#### PORTABLE EQUIPMENT







#### **Wacker Generator** 2.0kVA Inverter

- Weight (without fuel): 21kg
- Dimensions: 499 x 285 x 455mm
- Max. Output Power: 1.8kW
- Rated Output Power: 1.6kW • DC Output: 12V, 8.3A
- Engine Type: Air-cooled, single cylinder, 4-cycle gasoline engine
- Runtime: 4h
- Fuel Capacity: 4L
- Engine Rated Power: 2.2kW/5000rpm

code: 300-MG2I



#### **Wacker Generator** 5.0kVA Inverter

- Rated voltage single phase: 230V
- At RPM: 3000rpm
- Runtime: 8 hours
- 2 x Single phase outlets

code: 0630393







#### REABAR SAFETY

#### **Heavy Duty Steel Lined Rebar Protection Caps**

- The solution to a quality, strong, sturdy fixing, 100% safe Rebar cap
- These German manufactured safety caps have a steel lining to prevent rupturing the plastic
- Available in 2 different sizes



- Suits rebar size 6mm-20mm OD
- 40 per bag

code: 114013

- Suits rebar size 20mm-36mm OD
- 30 per bag

code: 114014

**1m Nevosafe Rebar** Safety Strip - Steel Reinforced Liner

- Suits rebar size 6mm-20mm OD



code: 104094

1m Nevosafe Rebar Safety Strip - Non Reinforced

code: 104096







#### **CONSTRUCTION SITE REBAR BENDING EQUIPMENT**

#### Rebar bender 20mm Ø Capacity

- 240V power supply
- Weight: 59kg
- Excellent for stirrup bending
- Can bend 2 x 10mm high tensile rebar in 1 action
- Made in Turkey

code: MG20B



#### Rebar bender 24mm Ø Capacity

- 18mm high tensile capacity
- 240V power supply
- Weight: 160kg
- Foot pedal or button control
- Made in Turkey

code: BT24X5



#### MAGNET BASE DRILLS

#### V32 - 32mm Ø Low Headroom Drill

- Single speed: 450rpm
- Height: 227mm, 185mm handle removed
- Up to 32mm Ø capacity
- Drilling Capacity 35mm deep
- Weight: 10kg

code: 18710



#### RB80X - 80mm Ø **Capacity Mag Drill**

- 4 speed gearbox: 110, 175, 245 and 385rpm
- High performance 1800 watt motor
- Up to 80mm diameter & 50mm deep
- Up to 32mm twist drill capacity
- Weight: 19.5kg
- Magnet size: 92 x 220mm

code: 18781





#### RB35 - 35mm Ø **Capacity Mag Drill**

- 19mm Weldon Shank
- Grub screw chuck
- Up to 35mm Ø capacity
- Supplied with carry case • Weight: 10.6kg
- Single speed 450rpm
- 120mm stroke

code: 18400



#### RB50X - 50mm Ø **Capacity Mag Drill**

- 2 Speed gearbox: 250 450rpm
- Up to 50mm Ø capacity
- No.2 MT chuck
- Drilling capacity 50mm deep
- Weight: 15kg

code: 18751





#### **RQX Cutters**



CODE:	LENGTH:	DRILLING DEPTH:	CODE:	LENGTH:	DRILLING DEPTH:
1902012025	12mm	25mm	1902022025	22mm	25mm
1902012050	12mm	50mm	1902024025	24mm	25mm
1902013025	13mm	25mm	1902025025	25mm	25mm
1902013050	13mm	50mm	1902025050	25mm	50mm
1902014025	14mm	25mm	1902026025	26mm	25mm
1902014050	14mm	50mm	1902026050	26mm	50mm
1902015025	15mm	25mm	1902027025	27mm	25mm
1902016025	16mm	25mm	1902027050	27mm	50mm
1902017025	1 <i>7</i> mm	25mm	1902028025	28mm	25mm
1902017050	1 <i>7</i> mm	50mm	1902028050	28mm	50mm
1902018050	18mm	50mm	1902029025	29mm	25mm
1902019025	19mm	25mm	1902030025	30mm	25mm
1902019050	19mm	50mm	1902030050	30mm	50mm
1902020050	20mm	50mm	1902031025	31mm	25mm
1902021025	21mm	25mm	1902032025	32mm	25mm
1902021050	21mm	50mm	1902032050	32mm	50mm

#### **Ejector Pins**



CODE:	LENGTH:	DRILLING DEPTH:
1950500	_	50mm
1926500	_	25mm

## **ROTARY DRILL ACCESSORIES**

#### **SDS PLUS Drills**





**SDS-PLUS** Hilti TE-C





#### **SDS MAX Drills**



KXZ320570





570mm



CODE:	DIAMETER:	DRILLING DEPTH:	O.A.L:	
KPZ050160	5.0mm	100mm	160mm	
KPZ050210	5.0mm	150mm	210mm	
KPZ060160	6.0mm	100mm	160mm	1
KPZ060210	6.0mm	150mm	210mm	
KPZ060260	6.0mm	200mm	260mm	
KPZ080160	8.0mm	100mm	160mm	620
KPZ080210	8.0mm	150mm	210mm	
KPZ080260	8.0mm	200mm	260mm	63
KPZ100160	10mm	100mm	160mm	
KPZ100210	10mm	150mm	210mm	614
KPZ100260	10mm	200mm	260mm	<b>Y</b>
KPZ100310	10mm	250mm	310mm	611
KPZ120160	12mm	100mm	160mm	
KPZ120210	12mm	150mm	210mm	(1)
KPZ120260	12mm	200mm	260mm	
KPZ120310	12mm	250mm	310mm	
KPZ120450	12mm	400mm	450mm	
KPZ140160	14mm	100mm	160mm	
KPZ140210	14mm	150mm	210mm	
KPZ140260	14mm	200mm	260mm	
KPZ140310	14mm	250mm	310mm	8
KPZ160160	16mm	100mm	160mm	5/16
KPZ160210	16mm	150mm	210mm	
KPZ160260	16mm	200mm	260mm	
KPZ160450	16mm	400mm	450mm	
KPZ180250	18mm	200mm	250mm	
KPZ180450	18mm	400mm	450mm	
KPZ200250	20mm	200mm	250mm	
KPZ200450	20mm	400mm	450mm	

CODE:	DIAMETER:	DRILLING DEPTH:	O.A.L:
KXZ160340	16mm	200mm	340mm
KXZ160540	16mm	400mm	540mm
KXZ180340	18mm	200mm	340mm
KXZ180540	18mm	400mm	540mm
KXZ200320	20mm	200mm	320mm
KXZ200520	20mm	400mm	520mm
KXZ220320	22mm	200mm	320mm
KXZ220520	22mm	400mm	520mm
KXZ240320	24mm	200mm	320mm
KXZ240520	24mm	400mm	520mm
KXZ250320	25mm	200mm	320mm
KXZ250520	25mm	400mm	520mm
KXZ280370	28mm	250mm	370mm
KXZ280570	28mm	450mm	570mm
KXZ300370	30mm	250mm	370mm
KXZ300570	30mm	450mm	570mm
KXZ320370	32mm	250mm	370mm

450mm

#### **SDS MAX Dustless Drills**

32mm

CODE:	DIAMETER:	DRILLING DEPTH:	O.A.L:
KDSXZ16600	16mm	400mm	600mm
KDSXZ18600	18mm	400mm	600mm
KDSXZ20600	20mm	400mm	600mm
KDSXZ22600	22mm	400mm	600mm
KDSXZ24600	24mm	400mm	600mm
KDSXZ25600	25mm	400mm	600mm
KDSXZ28600	28mm	400mm	600mm
KDSXZ30600	30mm	400mm	600mm
KDSXZ32600	32mm	400mm	600mm

#### **SDS PLUS Dustless Drills**

CODE:	DIAMETER:	DRILLING DEPTH:	O.A.L:	
KDSPZ10270	10mm	150mm	270mm	Ū
KDSPZ12320	12mm	200mm	320mm	9
KDSPZ14370	14mm	250mm	370mm	
KDSPZ16370	16mm	250mm	370mm	
KDSPZ18370	18mm	250mm	370mm	
KDSPZ20370	20mm	250mm	370mm	
KDSPZ24370	24mm	250mm	370mm	I

#### **SDS PLUS Chisels**

CODE:	LENGTH:	WIDTH:	TYPE:	
SPFC20250	250mm	20mm	Chisel	
SPSC40250	250mm	40mm	Chisel	
SPPC250	250mm	N/A	Point	
KPZ00250SP	250mm	N/A	Spiral Point	
KPZ00250S	250mm	40mm	Spade Chisel	
KPZ00200TC	200mm	40mm	Tile Chisel	

#### **SDS MAX Chisels**

CODE:	LENGTH:	WIDTH:	TYPE:	
SXFX25280	280mm	25mm	Chisel	
SXFC25400	400mm	25mm	Chisel	A Section
SXFC50400	400mm	50mm	Chisel	
SXFC80300	300mm	80mm	Chisel	
SXPC280	280mm	N/A	Point	
SXPC400	400mm	N/A	Point	
5818	400mm	N/A	Bushing Tool	
KMZ00400SP	400mm	N/A	Spiral Point	
KMZ00300S	300mm	80mm	Spade Chisel	
KMZ00300TC	300mm	50mm	Tile Chisel	



#### **POWER TOOLS**

#### 18V 20mm Capacity **Rotary Hammer - SDS PLUS**

- Shank type: SDS plus
- Battery: 18V Tool Only
- Net weight: 3.5kg
- Voltage: 18V

• Carbon brush: 441

code: DHR2022



#### **40mm Capacity Rotary Hammer - SDS MAX**

- Shank type: SDS max
- Voltage: 240V
- Net weight: 6.8kg
- Tool Only
- Wattage: 1,100W



#### Variable Speed **Recipro Saw**

- Net weight: 3.2kg
- Wattage: 1,200W
- Tool-less blade change

code: JR3051TTK



#### 32mm Capacity **Rotary Hammer - SDS PLUS**

- Shank type: SDS plus
- Voltage: 240V Tool Only
- Net weight: 5.2kg
- Wattage: 850W

• Power cord: 5.0m

code: HR3210C

#### **52mm Capacity Rotary Hammer - SDS MAX**

- Shank type: SDS max
- Voltage: 240V
- Net weight: 11.9kg
- Tool Only
- Wattage: 1,510W
- Power cord: 5.0m



#### 125mm **Angle Grinder**

- Disc size: 125mm
- Net weight: 2.4kg
- Wattage: 1,100W
- Power cord: 2.5m Paddle switch

code: 9565P

#### **Demolition Breaker**

- 33.8 Joules
- Net weight: 17kg
- Wattage: 1,510W
- Power cord: 5.0m • Shank size: 30mm Hex
- AVT (Anti-Vibration Technology)
- Blows per minute: 730-1450ipm

code: HM1317C



CODE:	PRODUCT:
E89-2	Moil
E89-5	Flat Chisel
E89-8	Scaling Chisel
E89-10	Spade

230mm Angle Grinder **Two Stage Trigger** 

- Disc size: 230mm
- Net weight: 5.5kg
- Wattage: 2,400W
- Torque limiter, anti-vibration grip with soft start

code: GA9040S01



## **CONCRETE CORE DRILLING**

#### **Concrete Core Drill**



- Made in Germany
- 202mm Ø capacity
- High quality, professional machine
- \*Core drill and stand sold seperately Stand code: 6190-9646000



#### **Drill Stand**

- Quick-mounting adapter for fast drill mounting
- Up to 45° swivel Hole centre indicator
- Spirit level
- 2 sided feed handle
- 14kg







CODE:	WATTS:	VOLTAGE:	GEAR BOX:	SPEED:	SPINDLE:	WEIGHT:	DRILLING CAPACITY Ø:
6190-PLD182.1NT	2300	240	3 Speed	0-520, 1200, 2500rpm	G½" F + 1¼" M	7.5kg	12-202mm

#### **Core Drill & Stand 450mm Capacity**



- Made in Germany
- 450mm Ø capacity
- Powerful 3300 W motor
- Soft start, over current cut-off, overload indication
- Mechanical safety overloading clutch Stand drilling angles 45 90 deg Fine Adjustment stand feed 1:3

- 2 sided feed lever change without any tools
- Wheeled stand for easy transport







CODE:	WATTS:	VOLTAGE:	GEAR BOX:	SPEED:	SPINDLE:	WEIGHT:	DRILLING CAPACITY Ø:
6190-0373B000	3300	240	3 Speed	180, 450, 780rpm	11/4"M	36 kg	71-450mm



## **DIAMOND CORE DRILL BITS**

#### **DBK Wet Core Bits**

- Suitable for use on Reinforced Concrete, Granite
- High end wet core bit with roof top turbo segments
- Suitable for hand drilling and stand drilling
- Bore: 11/4" UNC
- 10mm Diamond Segment
- Wet & Drv
- Laser welded segments up to 250mm  $\varnothing$





ODE:	SIZE:	DIAMETER:	SEGMENT QTY:	SEGMENT THICKNESS:
110-340007	DBK 32x450	32mm	4	3.0mm
110-340008	DBK 42x450	42mm	5	3.0mm
110-340009	DBK 52x450	52mm	5	3.5mm
110-340005	DBK 62x450	62mm	5	3.5mm
110-340411	DBK 67x450	67mm	6	3.5mm
110-340001	DBK 72x450	72mm	6	3.5mm
110-340006	DBK 82x450	82mm	7	3.5mm
110-340010	DBK 92x450	92mm	7	3.5mm
110-340002	DBK 102×450	102mm	8	3.5mm
110-340121	DBK 107×450	107mm	8	3.5mm
110-340004	DBK 112×450	112mm	9	3.5mm
110-340022	DBK 117x450	117mm	9	3.5mm
110-340011	DBK 122×450	122mm	10	3.5mm
110-340323	DBK 127×450	127mm	10	3.5mm
110-340003	DBK 132×450	132mm	10	3.5mm
110-340053	DBK 138×450	138mm	10	3.5mm
110-340012	DBK 142×450	142mm	11	3.5mm
110-340013	DBK 152×450	152mm	12	4.0mm
110-340014	DBK 162×450	162mm	12	4.0mm
110-340015	DBK 172×450	1 <i>7</i> 2mm	13	4.0mm
110-340016	DBK 182×450	182mm	14	4.0mm
110-340057	DBK 186x450	186mm	14	4.0mm
110-340017	DBK 192×450	192mm	14	4.0mm
110-340018	DBK 202×450	202mm	14	4.6mm
110-340019	DBK 225×450	225mm	15	4.6mm
110-340020	DBK 250x450	250mm	16	4.6mm
110-340122	DBK 270x450	270mm	17	4.6mm
110-340316	DBK 276x450	276mm	19	4.6mm
110-340021	DBK 300×450	300mm	19	4.6mm
110-340023	DBK 325x450	325mm	20	4.6mm
110-340317	DBK 341x450	341mm	22	4.6mm
110-340152	DBK 350x450	350mm	22	4.6mm
110-340213	DBK 400x450	400mm	23	5.0mm

#### **Pressurised Dust Suppression Tank**

6190-35811000 5 L



CODE:	SIZE:	HOSE LENGTH:

#### **Slurry Suppression Water Suction Ring**















#### **DIAMOND CUTTING & GRINDING**

#### **PCD Grinding Cup**

- High stock removal wheel
- Segment height: 4 mm
- Coarse polycrystalline diamonds



CODE:	DIAMETER:	BORE:	SEGMENT QTY:
6110-350015	125mm	22.2mm	12


#### Fine Grade **Diamond Grinding Cup**

- Fine grade
- Premium diamond grinding cup wheel with M14 thread
- Segment height: 6 mm
- Diamond grit #40/50 (grade 1)



CODE:	DIAMETER:	BORE:
6110-350096	125mm	M14

#### **MX13 Universal Concrete Blade**



- Segment height: 13mm
- Suitable for high speed saws and walk behind saws up to 33 HP
- Laser welded segments

1	13mm segment height
with	SHOXX//

CODE:	DIA:	BORE:	SEG QTY:	SEG THICKNESS:
6110-310346	125mm	22.2mm	9	2.6mm
6110-310348	180mm	22.2mm	13	2.4mm
6110-310349	230mm	22.2mm	16	2.6mm
6110-310353	350mm	25.4mm	24	3.0mm
6110-310355	400mm	25.4mm	28	3.2mm

SHOXX Technology Benefits - Intensive, continuous operation, faster cutting, universal material cutting.

#### Medium Grade **Diamond Grinding Cup**

- Medium stock removal wheel
- Segment height: 5.5 mm
- Optimal use: Concrete, Concrete products, Tile adhesive, Granite, Sand-lime bricks



Deep segment teeth

17mm segment height

#### 6110-350077 180mm 22.2mm 10 13mm segment height

#### **AX13 Asphalt Cutting Blade**

- Professional series asphalt blade with SHOXX forged segments
- Segment height: 13mm
- Low vibration
- Suitable for high speed saws and walk behind saws up to 33 HP
- Laser welded segments

CODE:	DIA:	BORE:	SEG QTY:	SEG THICKNESS:
6110-350339	350mm	25.4mm	21	3.0mm
6110-350341	400mm	25.4mm	24	3.2mm

#### **UX17 Concrete Cutting Blade**

- Massive 17mm segment height
- High-end diamond blade
- SHOXX forged segments giving exceptional longevity & wear resistance
- Laser welded segments
- Fast cutting blade
- Suitable for cutting most abrasive materials
- Titanium coated diamonds

CODE:	DIA:	BORE:	SEG QTY:	SEG THICKNESS:
6110-310137	230mm	22.2mm	15	2.8mm
6110-310141	350mm	25.4mm	22	3.0mm
6110-310201	400mm	25.4mm	25	3.2mm





### **CONCRETE GEAR**

#### **Extended Reach Concrete Grinder**

- Electronic soft start
- Easy exchangeable flexible drive shaft
- Robust joint for optimum adaptation to inclination angle
- Brush rim high suction power for dust-free working by connecting an industrial vacuum cleaner (accessory) to the 35mm nozzle
- Additional handle ergonomic handling, variably adjustable at

MILIE



CODE:	PRODUCT:	
6190-37128000	Swirl Jet Diamond Wheel	
6190-37126000	Turbo Cup Diamond Wheel	







CODE:	WATTS:	VOLTAGE:	SPEED:	SPINDLE:	WEIGHT:	DIAMETER:	
6190-6231000	1200	230	8000rpm	22.2mm	5.3kg	125mm	

## **Starmix Concrete Dust Extractors**



Capacity: 35L

Wattage: 1,600W

• Filter Vibration

• 240V Power Outlet

code: AISP35H



- M Class
- Capacity: 35L
- Wattage: 1,600W
- Filter Vibration
- 240V Power Outlet

code: AISP35M



- Capacity: 50L
- Wattage: 1,600W • Filter Vibration
- 240V Power Outlet

code: AISC50



#### **Dangerous Goods Storage**

- 1300 x 1240 x 1800mm
- Locking mechanism: Hasp and staple with padlock facility
- Includes gas storage sign
- Galvanised one piece folding construction





CODE:

TC1.2

## **Rubble Truck**

- 400L Capacity
- 750kg weight loading capacity
- 760w x 1460h mm
- 4 x certified crane lifting points
- Solid rubber, puncture proof wheels
- Rubber side protection buffers



#### **Pallet Truck**

Fork Length: 1220mm

Individual Fork Width: 160mm

Width Overall Forks: 685mm

Rigging points

Rated capacity: 2500kg



#### CODE:

CPT250

#### **Ratchet Tie Downs**

- 2500kg capacity
- 9m length



#### CODE:

Т9



#### **Optional Lid**







#### **INTERIOR HANDLING PRODUCTS**







CODE:	WIDTH:	LENGTH:	CAPACITY:
LA750	550mm	1350mm	750kg





CODE:	WIDTH:	LENGTH:	CAPACITY:
LA1000	730mm	1250mm	1000kg

#### **BundleRack Trolley**



CODE:	WIDTH:	LENGTH:	WEIGHT:	
BR1	1005mm	1560mm	79kg	

#### **PipeRack** Trolley





CODE:	WIDTH:	LENGTH:	WEIGHT:
PR1	1010mm	1565mm	83kg

#### **ZIPWALL** - The Complete Dust Containment Solution

ZipWall is a USA made product designed by a contractor who wanted to put up a dust barrier quickly, easily & economically. No marking, no nails and no tape.







#### Entry Kit Includes:

- 4x Steel spring loaded poles 1.4 3.2m
- 4x Non-skid Head
- 4x Head Plate
- 4x GripDisk
- 1x Standard Zipper 2 Pack
- 1x ZipPole Carry Bag
- 1x Film 40 micron 3.5 x 10m

CODE:	PRODUCT:	
ZIPO4	Entry Kit (8m cover)	
	To The State of th	



CODE: PRODUCT: HDAZ2 Heavy Duty Zips



CODE: PRODUCT: SLP6 6 x Spring Poles



CODE: PRODUCT: ZD37 ZipDoor (914 x 2130mm)



#### INTERIOR PROTECTION SOLUTIONS

#### **Poly Foam Surface Protection**





CODE:	THICKNESS:	AREA:	ROLL SIZE:
5038	2mm	60m²	1.2m x 50m
5038-3MM	3mm	60m²	1.2m × 50m

#### **Antimar Heavy Duty Floor Covering**



CODE:	SIZE:
AM-131	1m x 25m

#### **Self Adhesive Floor Cover**



CODE:	THICKNESS:	AREA:	ROLL SIZE:
CPF 500	80 micron	50m²	0.5m × 100m
CPF 1000	80 micron	100m²	1m x 100m

#### **Tape Range**



CODE:	TYPE:	WIDTH:	LENGTH:	CARTON QTY:
6133-PT4830BK	PVC	48mm	30m	24
6133-LT4833OR	Low Tac	48mm	33m	24
6133-CT4830BL	Blue Cloth	48mm	30m	30
MPC-4850BLK	Black Cloth	50mm	50m	30
MPC-4850SLV	Silver Cloth	50mm	50m	30

#### **Polyweave Carpet Cover**





CODE:	THICKNESS:	AREA:	ROLL SIZE:	QTY:
4121014/250	100 :	100 2	0 50	1-9 rolls
6131-PW250	100 micron	TOOm²	2m x 50m	10+ Rolls

#### **Polythene** Sheeting



CODE:	DIMENSIONS:	FINISH:	THICKNESS:
44-BLACKPLAS	4 X 25m	Black	250 micron
44-BLACKPLAS-50	4 X 50m	Black	230 micron
CPS5450	4 × 50m	Clear	00 :
TPS5450	4 x 50m	Clear Green	80 micron

#### **Powerpac High Density Cardboard**






CODE:	AREA:	ROLL SIZE:
6131-BB30	$30m^2$	820mm x 37m

#### mmammmm Flute **Board Sheeting**



CODE:	THICKNESS:	SIZE:	MOQ:
6131-CF241203	3mm	2.4m x 1.2m	20 sheets
6131-CF241205	5mm	2.4m x 1.2m	10 sheets

#### **Sticky Mat Tear-away Layers**



CODE:	SIZE:
6131-SM6090B	600mm x 900mm

#### Corrugated Cardboard



Ideal for protecting sensitive wall paneling or painted finishes.

CODE:	AREA:	ROLL SIZE:	
4020	O∩m²	1.2m v 75m	

#### Window **Protection Film**



CODE:	AREA:	ROLL SIZE:	
WPF500	500m <sup>2</sup>	500mm x 100m	
WPF1000	1000m²	1m x 100m	

## **Foam Protection** (For rails and corners)





CODE:	THICKNESS:	LENGTH:	INSIDE DIAMETER:
6131-FT80	10mm	1.95m	80mm
6131-FT120	1 Omm	1.95m	120mm



#### INTERIOR LIGHTING SOLUTIONS

#### 40W LED **Up Light**

- Light output: 3200 lumens
- 240V
- Very minimal fire risk due to low heat output
- Single power take off to enable linking to further light



CODE:	WATTAGE:
K1375L	40W

# **50W SMD LED**

Rechargeable Uplight	NEW!
IP44 Battery: 11.1V, 8800mAh Li-ion Light output: 4000 lumens Work time: 3 hours Charge time: 4-5 hours Includes charger	

CODE:	WATTAGE:	
V1110D	50\\/	



CODE:	WATTAGE:
6180-CL25LED	60W (PER LAMP)

#### **Cable Hangers**

- 20 pack
- Reduce tripping hazards



#### CODE:

6181-LH2OR

#### 600mm Portable LED Light with Battery Backup

- Comes with an emergency backup battery for power failure
- 240V
- IP65 Waterproof
- 16 AMP Plugs for daisy Chaining
- One hour of battery backup fitting available as part of the system
- LED automatically stays on after disconnection or loss of power for one hour before turning off
- 5m Cable

#### Includes brackets for mounting/hanging



#### Double 30W **Super LED Work Light with Tripod**

- IP65 Waterproof
- Very minimal fire risk due to low heat output





- 3m cable and plug fitted
- IP65 Rated
- Ideal for exterior site lighting
- Fix to hoarding and cranes
- Yellow steel frame for self standing



TAGGED!

CODE:	WATTAGE:
K1506H	100W
K1509H	200W

#### **Heavy Duty 30m Extension Leads**



10A lead

Complies with Standard: AS/NZS 3112:2000

#### CODE:

OX-P311730

#### **Free Standing Lead Stand**

- Height 1.3-2.5m
- Capacity 10 leads/6 hoses up to 30mm diameter
- Solid construction with foldable base



#### CODE:

6181-LEADSTAND

#### 1200mm Portable **LED Light**

- 220V-240V
- IP65 Waterproof
- 16 AMP Plugs for daisy Chaining
- 5m Cable

Includes brackets for mounting/hanging



CODE:	SIZE:	WATTAGE:	BRIGHTNESS:	WEIGHT:
K6061	1200MM	45W	4500LM	4.5KG

#### **TOOL STORAGE & SECURITY**

#### **OxBox**

- As strong as an Ox! Secure tool vaults.
- Unique internal anti-jemmy system.
- Facilities to fix the unit in position.

Material	2mm steel
Lock type	2x highly secure, keyed alike 5-lever deadlocks
Forklift dunnage	Yes
Gas struts	Yes
No. of keys	3 keys
Optional extras	Castors, shelves

Quick-fix bolt



Internal dimensions 1115 x 595 x 545mm **External dimensions** 1200 x 665 x 630mm (including protrusions) Weight 58kg

code: OX3



Internal dimensions 1125 x 565 x 1090mm **External dimensions** 1210 x 640 x 1175mm (including protrusions) Weight 104kg

code: OX4

#### **BarroBox**

**Castors fittings** 

- Unique, versatile & mobile site box, designed for workers who are on the
- Retractable wheels instantly convert the BarroBox from a mobile unit to a static unit, making it very difficult to move without a key.
- Unique anti-jemmy systems.
- Easy grip, folding handles ensure the BarroBox is easy to manoeuvre.
- Unique SlamStop safety stay to keep you safe when reaching into the box or closing the lid.

Internal dimensions	600 x 797 x 608mm
External dimensions (including protrusions)	770 x 1045 x 716mm
Weight	82kg
Material	2mm lid, 1.5mm body, steel
Lock type	2x highly secure, keyed alike 5-lever deadlocks

Forklift slots Yes Gas struts Yes No. of keys 3 keys

code: BB2









armorgard





#### **Cutting Station**

- Eliminate the spread of dust and sparks
- Sound buffering material to reduce noise pollution
- Dust extraction hood to suck away all dust
- Lockable cabinet
- Supplied with castor wheels to easily manoeuvre

code: SS7

**Bonus Free 350mm Makita Chop Saw** model LW 1400 worth \$550.00.



# **CUSTOM BRANDING ALSO AVAILABLE**



















#### **Site Station**

- Secure on-site workstation providing a compact site office and central hub.
- Split into two compartments with separate lockable doors, both containing full width shelving for easy organisation of contents.
- Slanted working shelf in top section also acts as a lockable lid for the compartment behind. Ideal for storing anything from PPE to fixings and power tools.
- Allows project managers to stay close to the work and workers on site, while reducing the requirement for temporary site offices.
- Robust design and 5-lever deadlocks ensure the SiteStation is
- LED work light and 2x 110V sockets are built in. Lifting eyes, fork pockets and castors mean the unit is very mobile and easy to move
- Weather resistant rubber gaskets around the openings help prevent water ingress.

Internal dimensions         Top = 1300x800x106           Bottom = 1300x800x6	
External dimensions (including protrusions)	1400x845x1970mm
Weight	223kg
Colour	Charcoal grey: RAL7021
Finished coating	Powder coated steel
Material	Steel
Material thickness	1.5mm
Locking mechanism	3x highly secure, keyed-alike 5-lever deadlocks
Does it have forklift skids?	Yes
Quantity of keys supplied	3 keys
Optional extras available	50mm brass padlock
Quantity of shelves as standard	4
Are castors standard or optional extra?	Standard
How are the castors fitted?	Castor plates

code: SS2





#### **Armorgard InstructaHut**

- A meeting point; an induction board; an emergency station for mounting first-aid, fire and other safety items; and a notice board for other documents and signs.
- Serves as a flexible solution is an essential part of your on-site safety and compliance inventory.
- In-built forklift pockets
- Can be fitted with castors for super-mobility around site. Colour wrapping and safety kits can be ordered by special request.
- \*Contents not included



code: IH4

#### **InstaGate**

- Size extended:  $2185 \times 540 \times 1380$ mm
- Size closed: 440 x 540 x 1380mm

code: IG4



- Size extended:  $2380 \times 542 \times 1884$ mm
- Size closed: 450 x 452 x 1884mm

code: IG6



884mm



# CONSTRUCTION SITE POD

# Your mobile on site supply solution

# SUCCESSFULLY IMPLEMENTED AT LARGE SITES ACROSS NEW ZEALAND

- Turiteu Windfarm Downer
- PP2O Otaki Fletcher
- Ohakea RFN7 Hawkins
- Transmission Gulley CPB HEB
- WWTP Gisbourne MacDow





- No Container Rental Charges
- Regular stock replenishment
- Stored onsite, replenished onsite
- Saves your staff time & hassle
- The stocked product range is customised to suit your project

# **YOUR KEY CONTACTS**

#### Jay Suckling 021 228 2864

NZ Sales Manager jay.suckling@powerpac.co.nz

### Duncan Moore 021 0820 7762

Lower North Island Sales duncan.moore@powerpac.co.nz

#### Taylor Budge 022 098 6597

South Island Sales taylor.budge@powerpac.co.nz

#### Will Ford 021 573 843

Technical Concrete Sales william.ford@powerpac.co.nz

#### Ben Suckling 021 917 073

Auckland Sales ben.suckling@powerpac.co.nz

#### Emma Bregmen 022 155 6281

Auckland Sales emma.bregmen@powerpac.co.nz

#### Phil Hansen 022 645 1352

Auckland Sales phil.hansen@powerpac.co.nz

